

Designed for Efficiency, Delivered in Quality

PRO-560S



PRO-540S



8 colour

 PRO-540S Max. Print Width	 PRO-560S Max. Print Width	 LUCIA PRO ink	 FINE 1.28" Wide Print Head	 L-COA PRO
 Multifunction Roll System	 320 GB Hard Drive	 3.5" Colour LCD Touch Panel	 WiFi Connectivity	 Direct USB Drive Printing

Professional Production Print Quality

The imagePROGRAF PRO-540S and PRO-560S are the best solutions for large format printing productivity, delivering outstanding quality at high speeds and offering exceptional reliability.



SCAN HERE
FOR MORE INFO

DESIGNED FOR EFFICIENCY, DELIVERED IN QUALITY

Colour consistency, fast print speeds, and low running costs are what the new PRO Series line of large format printers were engineered for.

Introducing the Canon ImagePROGRAF PRO-540S and PRO-560S large format printers. With an 8-colour LUCIA PRO ink system built for advanced printing solutions, these printers are ideal for bringing production commercial photography advertisements, signage, POS, and soft proofing businesses to the next level.



ImagePROGRAF PRO-540S
 44" Printing Speed: 2.9min per A0



ImagePROGRAF PRO-560S
 60" Printing Speed: 2.9min per A0



Core Technologies



PRODUCTION REDEFINED

Canon thought of every detail when it came to building the ultimate large format production printer - no touch media loading, torque control on the take-up unit, a sub-ink tank system and a compact size, reaching a whole new level of performance.

- MULTIFUNCTION ROLL SYSTEM**
- Second roll media printing
- Bi-directional take-up unit




Compact Size: PRO-540S - 1593 mm | PRO-560S - 1999 mm



- SUB-INK TANK SYSTEM**
- Enable ink tank replacement during printing



KEEP YOUR COLOUR IN LINE

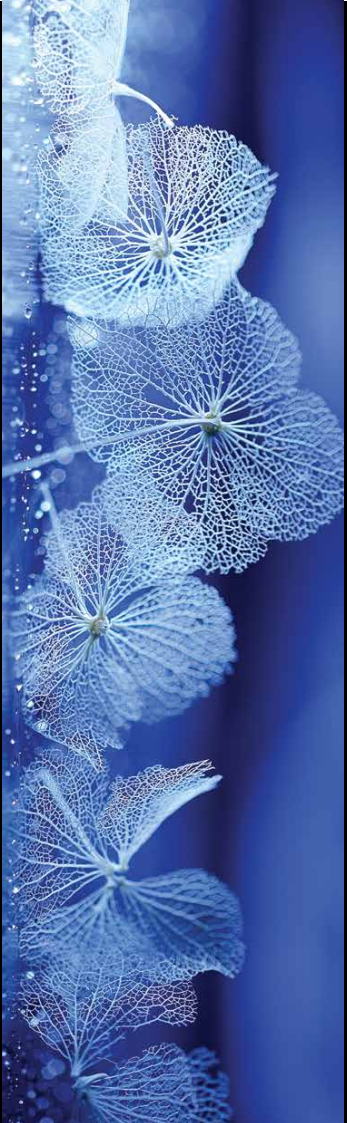


LUCIA PRO INK SYSTEM




• Wide Colour Gamut
The new LUCIA PRO ink system adopts newly formulated, microencapsulated 8 colour pigment inks. These inks help you achieve fantastic colour reproduction, image clarity, and fine lines, all ideal for creating vivid posters and advertising displays.

- Enhanced red colour performance
- Reduced graininess
- Enhanced dark area reproduction



• 8 Colour Ink System

To enhance print performance, the 8 colours use all 12 ink channels in the print head. The LUCIA PRO ink is arranged in a mirror layout on the print head, symmetrically arranging the colours: C, M, Y, MBK. This layout allows for the same ejection order of the four key colours during the bi-directional printing process, resulting in faster print speeds.

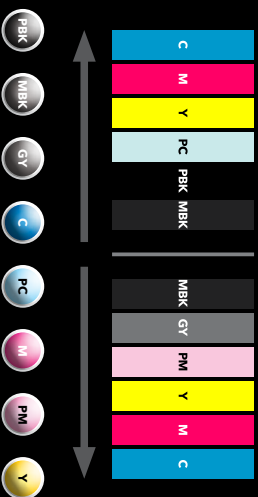

1.28" WIDE PRINT HEAD

• Newly Developed Print Head
At the heart of the imagePROGRAF PRO-540S and PRO-560S printers is a newly developed 1.28" wide, PF-10 print head with 18,432 nozzles. Using one print head as opposed to two like previous imagePROGRAF 8 colour models, the new PRO Series is able to achieve faster print speeds.



FINE
with 18,432 NOZZLES

• Anti-Clogging Technology

Ink ejection conditions are precisely checked with sensors, so if a clog is detected, another nozzle automatically provides backup. In addition to preventing wasted prints due to clogging, this also helps to reduce the frequency of nozzle cleaning.

• No Switching of Black Inks

The PRO Series is designed to work seamlessly when changing paper types. Matte Black and Photo Black inks have their own dedicated nozzles, so no switching is necessary. You can print on fine art paper then glossy paper with no worries, no changes, and no waste.

L-COA PRO IMAGE PROCESSOR



• New High-Precision Control Engine

Big jobs need fast processing. The imagePROGRAF printers are powered by the new L-COA PRO high-speed image processing engine. With three new processing chips, this high-precision control engine performs the processing of massive image data, generates the printing data, and controls the optimal ink layout that produces high-resolution prints, delivering supreme print quality at high speed.

HIGHLY PRECISE INK PLACEMENT WITH LITTLE INTER-COLOUR DISCREPANCY

• Uni-Body Design

The newly engineered unibody structure provides a strong platform for stable print head scanning, resulting in precise droplet placement. The perfect combination of speed and high-quality printing is achieved with this new design.


• Multi-Sensor

All PRO Series devices include a built-in multi-sensor to help ensure colour consistency, not only from one print to the next, but also from one PRO Series device to another. With the included Device Management Console software, calibrate and monitor up to 50 PRO Series devices with ease on both Canon and non-Canon media, ensuring highly consistent colour.

• Colour Calibration


Producing the correct colour is paramount when printing high-quality archival work. The built-in Colour Calibration function uses a multi-sensor to read colour density and automatically calibrate the printer, so that the last print looks as stunning as the first.

PRINTER OVERVIEW



- NEW**
ADVANCED SOFTWARE SOLUTION
- Print Studio Pro
 - Device Management Console

Ergonomic Compact Design
PRO-5405 - 1593 mm Wide
PRO-5605 - 1999 mm Wide



- HIGH CAPACITY INK TANKS**
- 160ml, 330ml and 700ml

- NEW**
HOT-SWAP INK TANKS
- Enable ink tank replacement during printing



- NEW**
1.28" WIDE PRINT HEAD
- Fast, supreme quality printing with 18,432 nozzles



- NEW**
EASY ROLL LOADING
- Automatic paper feeding
 - Load rolls without touching the printing surface of the paper



- NEW**
MULTI-POSITIONAL BASKET
- Regular basket
 - Flatted stacking
 - Front delivery
 - Slope



- NEW**
WATER RESISTANT MATTE POLYPROPYLENE POSTER PAPER
- Create weather resistant posters that can be posted semi-outdoor in a short time without film lamination



- NEW**
3.5" COLOUR LCD TOUCHSCREEN
- Easily view printer information

- NEW**
DIRECT USB DRIVE PRINTING
- Direct printing in PDF and JPEG



- NEW**
CONNECTIVITY
- Wi-Fi (IEEE 802.11b/g/n)
 - Gigabit network and high-speed USB



- NEW**
MULTI-FUNCTION ROLL SYSTEM
- Dual roll feeding
 - Rewinding function



PRINTER MANAGEMENT SOLUTIONS

Canon developed hardware and software innovations offer unique flexibility in any production environment.

INPUT AND OUTPUT VERSATILITY



• WI-FI CONNECTIVITY

Stay connected. A first for the Canon imagePROGRAF large format printers, Wi-Fi connectivity is now standard with the imagePROGRAF PRO series.

• DIRECT USB DRIVE PRINTING

- Directly print PDF and JPEG files from USB drives
- Input USB drive into the USB port on the printer, preview image on operation panel and print
- Fast and easy printing without the use of a computer

• EFFORTLESS MEDIA LOADING

- Include media adaptors with both 2" and 3" media core adjustments
- Automatic media feed into the printer, with no need to touch the paper, decreasing the risk of creasing and blemishes

• OPERATION PANEL

The 3.5" colour LCD touch-panel screen let users view printer information and perform commands easily.

• MULTI-FUNCTION ROLL SYSTEM USED IN TWO DIFFERENT WAYS

- Different media type and size loading on second roll
- Operator configured as a bi-directional take-up unit

• MULTI-POSITIONAL BASKET

The PRO Series printers offer choices on how prints will be output based on the type and quantity being produced. Each comes standard with a multi-positional basket that can be configured as any of the following:

- **Regular catch basket**
- **Flashed stacker**
- **Slope**

GREAT SOFTWARE SELECTION

PRINT STUDIO PRO

Creating Canon large format prints is now easier with the introduction of Print Studio Pro plug-in for imagePROGRAF PRO Series large format printers. This software offers features that streamline your printing workflow.

Key Features include:

- **16-bit printing workflow**
- **Ability to print multiple-up images**
- **Large preview screen**
- **Import multiple images and make batch edits that apply to all**
- **Create "Favourites" settings**
- **Print history**
- **Soft proofing**
- **Edit tone curves and import/export**

QUICK UTILITY TOOLBOX

Quick Utility Toolbox is home to all Canon imagePROGRAF PRO Series printer software and tools.

• Accounting Manager

In today's printing environment, it is more important than ever to understand how much each print job is costing your business. Compatible with both Mac and Microsoft platforms, Accounting Manager serves as a powerful feature used for accurately managing your print costs. With Accounting Manager, you can track how much ink and paper is being consumed on printing with up to 50 printers.

• Media Configuration Tool

Recognising the expanding array of media options for large format printers and to further improve the versatility of these new imagePROGRAF models, Canon has developed a Media Configuration Tool, which allows customers to not only utilise Canon-branded media, but providing them the ability to make adjustments to printer settings to enhance the precision and quality of output achieved with custom media.

Additional Software Available

- **Print Plug-In for Microsoft Office**
- **Poster Artist Lite**
- **Media Configuration Tool**
- **Direct Print & Share**
- **Poster Artist (Optional)**

• Device Management Console

The Device Management Console software, ideal for fleet management, lets you perform colour calibrations remotely. This software lets you monitor the printer status of up to 50 printers from any location in the world, be notified by email when an error occurred, or check the amount of ink left in the printers without ever having to leave the comfort of your desk.

Settings that can be configured using media parameter adjustment features include:

- **Media weight and thickness**
- **Ink drying**
- **Automatic cutting settings**
- **Borderless printing Paper Feed amount**
- **Print-head height**
- **Vacuum strength**
- **Maximum ink usage**




SPECIFICATIONS

TECHNOLOGY		PRO-540S	PRO-560S
Printer Type	8 Colour 447/118 mm	8 Colour 607/1524 mm	
Print Technology	Canon BubbleJet on Demand (12 channels integrated Type x 1 print head)		
Number of Nozzles	18,432 nozzles (1,536 nozzles x 4 colours, 3072 nozzles x 4 colour)		
Maximum Print Resolution	2400 x 1200 dpi		
Nozzle Pitch	600 dpi x 2 (includes Non-firing nozzle detection and compensation system)		
Line Accuracy	±0.1% or less		
Ink Droplet Size	Minimum: 16 pl (3500 dpi) Standard: 20 pl (3000 dpi)		
Ink Capacity	Bundled starter ink: 330ml		
Ink Type	Pigment inks - Photo Black, Matte Black, Cyan, Magenta, Yellow, Photo Cyan, Photo Magenta, Grey		
OS Compatibility	Microsoft Windows 32 Bit / Vista, 7, 8, 8.1, 10, Server 2008 64Bit, Vista, 7, 8, 8.1, 10, Server 2008/R2, Server 2012/R2 Apple Macintosh, OSX 10.7.5 - 10.11		
MEMORY			
Standard Memory	3 GB		
Hard Drive	320 GB		
FIRMWARE			
Printer Language	SoftRaster (Swift Graphic Raster)		
PDF	Supported Version 1.7		
JPEG	Supported Version JFIF 02		
Job Control	I/VEC		
Status Reply	SNMP-MIB (Standard MIB, Canon-MIB), I/VEC, GPCX		
Direct Print	JPEG/PDF		
Type	Flash ROM		
OPERATION PANEL			
Update	Updated from USB, Ethernet port (Utility use)		
Display	LCD 0.5 inch/1.8 cm TFT colour		
Language on Operation Panel	16 languages: English, French, German, Italian, Spanish, Brazilian Portuguese, Dutch, Polish, Russian, Danish, Simplified Chinese, Traditional Chinese, Korean, Thai, Indonesian, Turkish		
INTERFACE			
USB A Port	Type: USB Memory (Direct Print)		
USB B Port	Type: Built-in (Hi-Speed USB) Mode: Full Speed (12 Mbit/sec), High Speed (480 Mbit/sec), Bulk Transfer		
Gigabit Ethernet	Connector type: Series B (4 pins) Type: Built-in Standard: IEEE 802.3 10base-T • IEEE 802.3u 100base-TX / Auto-Negotiation • IEEE 802.3ab 1000base-T / Auto-Negotiation • IEEE 802.3x Full Duplex Protocol: SNMP (Canon-MIB, HTTP, TCP/IP (IPv4/IPv6)) Standard: IEEE802.11n/IEEE802.11g/IEEE802.11b Security: • WEP (64/128bit) • WPA-PSK (TKIP/AES) • WPA2-PSK (TKIP/AES)		
Wireless LAN			
PRINTING SPEED			
MEDIA TYPE	PRINT MODE	A0 SIZE	
Plain Paper	(Level 5)	00:55	
	Fast	01:34	
	Standard	02:51	
Coated Paper	Fast	01:35	
	Standard	02:51	
	High	05:36	
	Fast	02:58	
	Standard	04:46	
Glossy Photo Paper HG 235	Standard	05:36	

*Print speed is based on the default setting using ISO JIS G5 Clm image and does not take into account data processing time on host computers. Print speed may vary depending on the system configuration, interface, software, document complexity, print mode, page coverage, type of paper used, etc.

MEDIA HANDLING		PRO-540S	PRO-560S
Media Feed and Output	Roll Paper: Roll, Front-loading, Front Output Cut Sheet: Roll, Front-loading, Front Output	Roll Paper: Roll, Front-loading, Front Output Cut Sheet: Roll, Front-loading, Front Output (Manual feed)	Roll Paper: Two Roll, Front-loading, Front Output Cut Sheet: Front-loading, Front Output (Manual feed)
Media Width	Roll Paper: 203.2 mm - 118 mm Cut Sheet: 203.2 mm - 118 mm	Roll Paper: 203.2 mm - 118 mm Cut Sheet: 203.2 mm - 118 mm	Roll Paper: 203.2 mm - 1524 mm Cut Sheet: 203.2 mm - 1524 mm
Media Thickness	Roll: 0.07 - 0.8 mm	Roll: 0.07 - 0.8 mm	Roll: 0.07 - 0.8 mm
Minimum Printable Length	203.2 mm	203.2 mm	203.2 mm
Maximum Printable Length	Roll Paper: 1.8 m (Varies according to the OS and application) Cut Sheet: 1.8 m	Roll Paper: 1.8 m Cut Sheet: 1.8 m	Roll Paper: 1.8 m Cut Sheet: 1.8 m
Maximum Media Roll Diameter	170 mm	170 mm	170 mm
Media Core Size	Internal diameter of roll core: 27.3"	Internal diameter of roll core: 27.3"	Internal diameter of roll core: 27.3"
Margins Recommended Area	Roll Paper: Top: 20 mm, Bottom: 3 mm, Side: 3 mm Cut Sheet: Top: 20 mm, Bottom: 20 mm, Side: 3 mm	Roll Paper: Top: 20 mm, Bottom: 3 mm, Side: 3 mm Cut Sheet: Top: 20 mm, Bottom: 20 mm, Side: 3 mm	Roll Paper: Top: 20 mm, Bottom: 3 mm, Side: 3 mm Cut Sheet: Top: 20 mm, Bottom: 20 mm, Side: 3 mm
Margins Printable Area	Roll Paper: Top: 3 mm, Bottom: 3 mm, Side: 3 mm Cut Sheet: Top: 3 mm, Bottom: 3 mm, Side: 3 mm	Roll Paper: Top: 3 mm, Bottom: 3 mm, Side: 3 mm Cut Sheet: Top: 3 mm, Bottom: 3 mm, Side: 3 mm	Roll Paper: Top: 3 mm, Bottom: 3 mm, Side: 3 mm Cut Sheet: Top: 3 mm, Bottom: 3 mm, Side: 3 mm
Media Feed Capacity	Roll Paper: One roll Cut Sheet: 1 sheet	Roll Paper: One roll Cut Sheet: 1 sheet	Roll Paper: Two roll automatic switching possible Cut Sheet: 1 sheet
Media Take-up Roll Unit	Dual direction roll take-up unit	Dual direction roll take-up unit	Dual direction roll take-up unit
Borderless Printing Width (Roll Only)	Recommended: 515 mm (US B2), 728 mm (US B1), 1030 mm (US B0), 594 mm (50 A1), 841 mm (50 A0), 10", 14", 17", 24", 36", 42", 44", 54", 60" Printable: 515 mm (US B2), 728 mm (US B1), 1030 mm (US B0), 594 mm (50 A1), 841 mm (50 A0), 10", 14", 17", 24", 36", 42", 44", 54", 60" (50 A2), 8", 16", 30", 300 mm	Recommended: 515 mm (US B2), 728 mm (US B1), 1030 mm (US B0), 594 mm (50 A1), 841 mm (50 A0), 10", 14", 17", 24", 36", 42", 44", 54", 60" Printable: 515 mm (US B2), 728 mm (US B1), 1030 mm (US B0), 594 mm (50 A1), 841 mm (50 A0), 10", 14", 17", 24", 36", 42", 44", 54", 60" (50 A2), 8", 16", 30", 300 mm	Recommended: 515 mm (US B2), 728 mm (US B1), 1030 mm (US B0), 594 mm (50 A1), 841 mm (50 A0), 10", 14", 17", 24", 36", 42", 44", 54", 60" Printable: 515 mm (US B2), 728 mm (US B1), 1030 mm (US B0), 594 mm (50 A1), 841 mm (50 A0), 10", 14", 17", 24", 36", 42", 44", 54", 60" (50 A2), 8", 16", 30", 300 mm
Maximum Number of Delivered Prints	Standard position: 1 sheet Flat position: A2 landscape, glossy paper less than 10 sheets, Coated paper less than 20 sheets (excludes strong curled condition)	Standard position: 1 sheet Flat position: A2 landscape, glossy paper less than 10 sheets, Coated paper less than 20 sheets (excludes strong curled condition)	Standard position: 1 sheet Flat position: A2 landscape, glossy paper less than 10 sheets, Coated paper less than 20 sheets (excludes strong curled condition)
POWER AND OPERATING REQUIREMENTS			
Power Supply	AC 100-240V (50-60Hz)	AC 100-240V (50-60Hz)	AC 100-240V (50-60Hz)
Power Consumption	Printing: 112 W or less Sleep mode: 3.6 W or less Power off: 0.5 W or less	Printing: 112 W or less Sleep mode: 3.6 W or less Power off: 0.5 W or less	Printing: 112 W or less Sleep mode: 3.6 W or less Power off: 0.5 W or less
Operating Environment	Temperature: 15-30°C, Humidity: 10-80% RH (no dew condensation)	Temperature: 15-30°C, Humidity: 10-80% RH (no dew condensation)	Temperature: 15-30°C, Humidity: 10-80% RH (no dew condensation)
Acoustic Noise (Power/Pressure)	Operation: 49 dB (A) Standby: 35 dB (A) or less Operation: 68 dB or less (priority: Standard) (Measured on ISO779 standard)	Operation: 49 dB (A) Standby: 35 dB (A) or less Operation: 68 dB or less (priority: Standard) (Measured on ISO779 standard)	Operation: 49 dB (A) Standby: 35 dB (A) or less Operation: 68 dB or less (priority: Standard) (Measured on ISO779 standard)
WHAT'S INCLUDED	Environment Certificates What's in the box? Software Included	Environment Certificates What's in the box? Software Included	Environment Certificates What's in the box? Software Included
ACCESSORIES OPTIONS	Printer Stand 2nd Roll Unit Z3" Roll Holder	Inclusive with printer RU-41 RH-2-45	RU-61 (mandatory) RH-2-45
CONSUMABLES	Ink Tank Print Head Cutter Blade Maintenance Cartridge	PH-51 (160ml), PH-53 (330ml), PH-57 (700ml) PE-10 CT-07 MC-30	PH-51 (160ml), PH-53 (330ml), PH-57 (700ml) PE-10 CT-07 MC-30
DIMENSIONS & WEIGHT	Package Dimensions (Main unit with pallet) W x D x H (mm) / Weight (kg) Main Unit + Stand + Basket Main Unit + Roll Unit Basket Closed: 1593 x 984 x 1168 mm Basket Opened: 1593 x 984 x 1168 mm Approx. 141 kg	1820 x 915 x 1019 mm / Approx. 172 kg 1727 x 562 x 461 mm / Approx. 31 kg Bakets Closed: 1593 x 984 x 1168 mm Bakets Opened: 1593 x 984 x 1168 mm Approx. 121 kg Main Unit + Roll Unit Basket Closed: 1593 x 765 x 1168 mm Basket Opened: 1599 x 984 x 1168 mm Approx. 141 kg	2227 x 915 x 1022 mm / Approx. 209 kg 2133 x 562 x 461 mm / Approx. 40 kg Bakets Closed: 1599 x 765 x 1168 mm Bakets Opened: 1599 x 984 x 1168 mm Approx. 137 kg Main Unit + Roll Unit Basket Closed: 1999 x 765 x 1168 mm Basket Opened: 1999 x 984 x 1168 mm Approx. 163 kg



imagePROGRAF
PRO-540S | PRO-560S

Professional Production Print Quality



Canon

Delighting You Always

CANON SINGAPORE PTE. LTD.

1 Fusionopolis Place, #15-10 Galaxis, Singapore 138522

Tel : 65-6799-8888 | Fax : 65-6799-8882 | www.canon-asia.com

Tel : 65-6799-8888

Fax : 65-6799-8882

www.canon-asia.com

CANON BUSINESS PARTNER / DEALER'S STAMP

This document is for information purpose only. The contents are subject to change without notice. Product options, name and availability may vary by regions. We expressly disclaim any liability or contractual obligations with respect to this document. Brands and product names are trademarks and/or registered trademarks of their respective owners.

Warning: Unauthorised recording of copyrighted materials may infringe on the rights of copyright owners and be contrary to copyright laws.